





Combi 15/5

Capacity at 5 bar	Literleistung bei 5 bar	18.4 l/min
Article no.	Artikel-Nr.	85063*
Working diaphragms	Arbeitsmembrane	2 x NBR
Accumulator diaphragms	Druckspeichermembrane	1 x NBR
Inlet- ϕ suction	Einlass- ϕ Saugseite	20 mm
Outlet- ϕ pressure	Auslass- ϕ Druckseite	8 mm
Weight	Gewicht	8 kg

* NBR diaphragms, Motor 200W, 12VDC
 * NBR Membrane, Motor 200W, 12VDC

Basic Parameters Eckdaten		18.4
Nominal speed [rpm]	Nennzahl [U/min]	1400
Power [KW]	Leistung [KW]	0.14
Permanent pressure [bar]	Druck, auf Dauer [bar]	max. 10
MAX Temperature [°C]	Temperatur max. [°C]	60
Oil type	Ölsorte	30
Oil capacity [l]	Ölmenge [l]	0.075
Lubrication: Oil bath	Schmierung: Ölbad	
Materials: Aluminium, NBR seals, Polipropylene	Material: Aluminium, NBR-Dichtungen, Polipropylen	

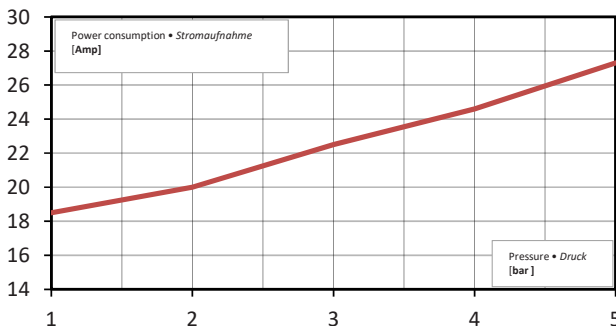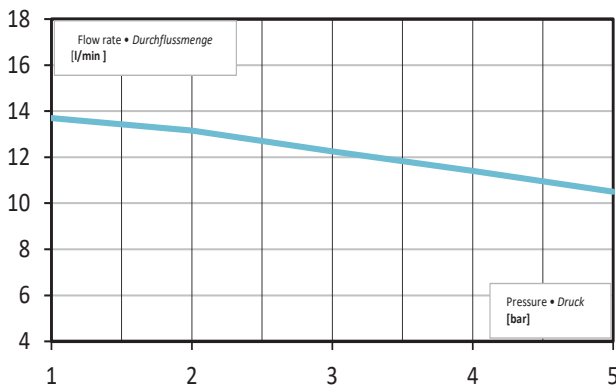

Power Consumption at 540 rpm Leistungsaufnahme bei 540 U/min	3 bar	4 bar	5 bar
	0,12 kW	0,15 kW	0,16 kW

Specifications in mm
Angaben in mm

